

Audio & Video Balun

Features:

- Allows audio & video signal to be transmitted via a single Cat 5e Cable
- High Reliability and Durability
- Housed in a fire retardant wall mountable Case
- Low cost, high quality and performance
- Passive device (no power supply required)
- Stable over working temperature between 0 °C to +55 °C


Application:

The Audio & Video Balun enables structured audio distribution of dual mono or single stereo audio & video signals via Cat 5e/Cat 6 UTP cable.

This Balun provides a low cost and versatile cabling solution for audio & video distribution, for example, VCR output to TV or Projector.



Audio & Video Balun
3 RCA Female to 1 RJ45
Part Number: E10655

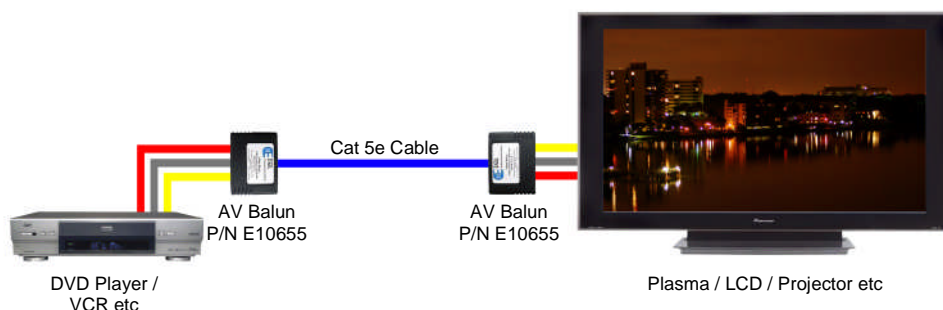

Specifications:

Bandwidth:	Video: DC to 8MHz Audio: 20Hz to 50KHz
Connector:	RCA x 3 (Yellow, White, Red)
Impedance:	RCA 75 Ω (Yellow – Video, White/Red - Audio)
Maximum distance:	Colour Video: Up to 400m via Cat 5 Audio: Up to 1500m via Cat 5
Insertion Loss:	2dB over the frequency range
Return Loss:	15dB over the frequency range
Common Mode Rejection:	> 40dB at 8MHz
Cable UTP:	24 AWG or lower solid copper twisted pair wires
	Impedance: 100 ohm at 1MHz
	Capacitance: 20 pf/ft
	Attenuation: 6.6dB/100ft at 1MHz
RJ45 Pin out:	Video (Yellow): Pins 7 + / 8 - L Audio (White): Pins 6 + / 3 - R Audio (Red): Pins 2 + / 1 -
Temperature:	Operating: 0 to 55° C Storage: -20 to 85° C Humidity: Up to 95%
Dimensions:	81 x 60 x 24mm

Note: Specifications subject to change without notice.

EQL Teleconnect

Unit 20, 13 Swaffham Road
Minto NSW 2566
Australia

Postal Address:
P.O. Box 351
Minto NSW 2566
Australia

Tel: +61 2 9824 5680
Fax: +61 2 9824 5685
Email: sales@teleconnect.com.au
Web: www.teleconnect.com.au

ABN: 93 098 402 218